

**CITY OF FLORISSANT  
DEPARTMENT OF PUBLIC WORKS  
OFFICE OF THE CITY ENGINEER**

**EXCAVATION PERMIT APPLICATION**

Application is hereby made to the City of Florissant, Office of the City Engineer, to perform excavation in the City right-of-way. Please complete the following information:

Owner: \_\_\_\_\_ Phone: \_\_\_\_\_

Address: \_\_\_\_\_

Contractor: \_\_\_\_\_ Phone: \_\_\_\_\_

Address: \_\_\_\_\_ Zip Code: \_\_\_\_\_

Field Representative: \_\_\_\_\_ Phone: \_\_\_\_\_

Approx. Start Date: \_\_\_\_\_ Completion Date: \_\_\_\_\_

(The owner/contractor shall notify the City Engineer's Office 48 hours prior to beginning work to schedule an inspection).

Excavation Location: \_\_\_\_\_

Description of excavation and/or construction: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_

**APPLICANT SHALL SUBMIT THE FOLLOWING:**

1. A drawing indicating the area of improvements showing the property lines, street and all relative dimensions.
2. Please indicate if driveway/sidewalk is to be constructed of concrete or asphalt.
3. Bond and Insurance is required of the contractor in accordance with Sec. 22-26 and Sec. 22-47 of the Florissant City Code.

\_\_\_\_\_  
Owner or Contractor

\_\_\_\_\_  
Date

-----  
**CITY OF FLORISSANT OFFICE USE ONLY**

Bond: \_\_\_\_\_ Certificate of Insurance: \_\_\_\_\_

Permit No. \_\_\_\_\_ Date Issued: \_\_\_\_\_

Permit Approved By: \_\_\_\_\_ Permit Fee: \_\_\_\_\_

REMARKS:


PROPERTY LINE - NO CONSTRUCTION IS ALLOWED PAST THIS LINE

HOUSE

\*IF DRIVEWAY LOCATED ELSEWHERE  
REFERENCE ALL DIMENSIONS TO THE  
APPROPRIATE PROPERTY LINES

CITY RIGHT OF WAY  
6" THICK CONCRETE  
OR 9" ASPHALT  
MINIMUM

12'

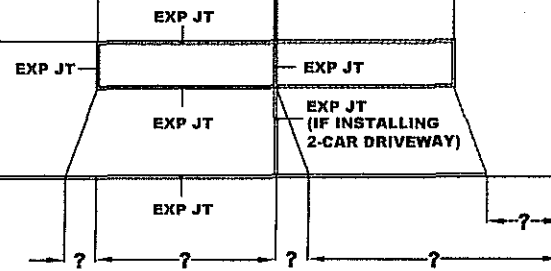

STREET

**GENERAL NOTES:**

\*SUBGRADE MUST BE INSPECTED  
AND APPROVED BEFORE PLACING  
CONCRETE OR ASPHALT PAVING  
IN CITY RIGHT OF WAY

\*48 HOUR NOTICE MUST BE  
GIVEN PRIOR TO INSPECTION

\*ALL DIMENSIONS MUST BE ACCURATE

\*SEE EXCAVATION PERMIT FOR  
ADDITIONAL INFORMATION

\*IF SIDEWALK IS TO BE REPLACED  
GIVE LENGTH AND NUMBER OF SECTIONS

\*EXP JT - FULL DEPTH EXPANSION JOINT

**CONCRETE:**

\*4000 PSI CONCRETE (6.5 SACK)  
MERAMEC SAND AND GRAVEL IS REQUIRED

\*COMPACTED SOIL OR ROCK BASE

**ASPHALT:**

\*APPROACH MUST BE 9" THICK  
(6" BASE COURSE, 3" SURFACE COURSE)  
WITH 4" COMPACTED ROCK BASE

\*PRIVATE DRIVEWAY MUST BE 4" THICK  
WITH 4" COMPACTED ROCK BASE